



MECANIZADO PARA SOPORTE BK

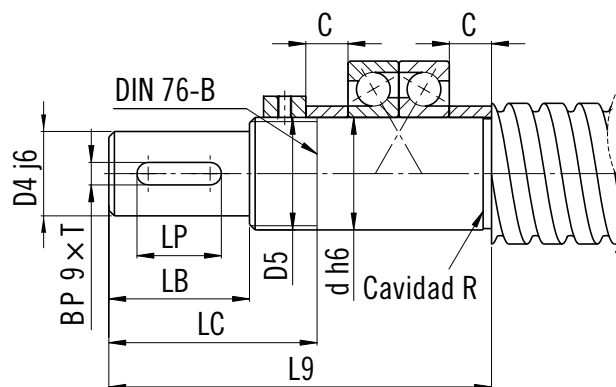

Mecanizado BK	Ø nominal del husillo	d	D4	L9	LC	LB	D5
BK10	12/14/15	10	8	51	31	15	M10×1
BK12	14/15/16	12	10	51	29	15	M12×1
BK15	18/20	15	12	60	32	20	M15×1
BK17	20/25	17	15	76	35	23	M17×1
BK20	25/28	20	17	78	40	25	M20×1
BK25	32/36	25	20	95	55	30	M25×1,5
BK30	36/40	30	25	110	63	38	M30×1,5
BK35	45	35	30	126	73	45	M35×1,5
BK40	50	40	35	143	85	50	M40×1,5

MECANIZADO PARA SOPORTE BF



Mecanizado BF	Ø nominal del husillo	D10	L10	DE	L16	L17
BF06	8	6	9	5,7	6	0,8
BF08	10	6	9	5,7	6	0,8
BF10	12/14/15	8	10	7,6	7	0,9
BF12	14/15/16	10	11	9,8	8	1,15
BF15	18/20	15	13	14,3	9	1,15
BF17	20/25	17	16	16,2	12,35	1,15
BF20	25/28/30	20	19 (16)	19	14	1,35
BF25	30/32/36	25	20	23,9	15	1,35
BF30	36/40	30	21	28,6	16	1,75
BF35	40/45	35	22	33	17	1,75
BF40	50	40	23	38	17,8	1,95


Technical drawing of a DIN 76-B plug. The drawing shows a cross-section of the plug with various dimensions and labels. The dimensions are: D4 j6 (outer diameter), LB (length of the plug), LC (length of the plug), L8 (length of the plug), D5 (inner diameter), d h6 (inner diameter), C (width of the plug), and C (width of the plug). The labels are: DIN 76-B, Cavity R, and Cavity R.

Technical drawing of a screw with a conical seat and a cylindrical part. The drawing shows a side view of the screw with a conical seat on the left and a cylindrical part on the right. The conical seat has a radius R. The cylindrical part has a diameter of D10 j6 and a length of L17 H13. The total length of the screw is L16, and the length of the conical seat is L10. The drawing is labeled 'Cavidad R' and 'DE 0 -0.2'.




TECNOPOWER 57

MECANIZADO PARA SOPORTE FK

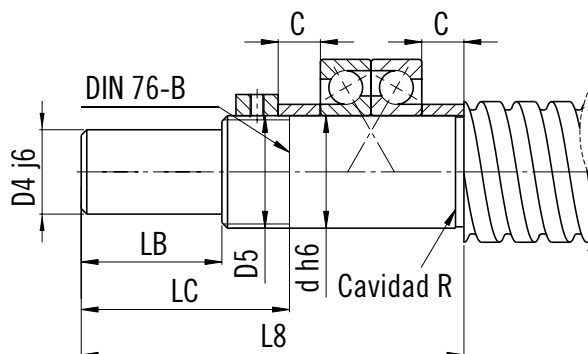

Mecanizado FK	Ø nominal del husillo	d	D4	L8	LC	LB	D5
FK08	12	8	6	41	19	9	M8×1
FK10	15/16	10	8	51	26	15	M10×1
FK12	16	12	10	51	26	15	M12×1
FK15	20	15	12	67	33	20	M15×1
FK17	20/25	17	15	76	40	23	M17×1
FK20	25/28/30	20	17	87	42	25	M20×1
FK25	30/32/36	25	20	106	50	30	M25×1,5
FK30	36/40	30	25	110	63	38	M30×1,5

MECANIZADO PARA SOPORTE FF



Mecanizado FF	Ø nominal del husillo	D10	L10	DE	L16	L17
FF06	8	6	9	5,7	6	0,8
FF10	12/14/15	8	10	7,6	7	0,9
FF12	14/15/16	10	11	9,6	8	1,15
FF15	18/20	15	13	14,3	9	1,15
FF17	20/25	17	16	16,2	12	1,15
FF20	25/28/30	20	19 (16)	19	14	1,35
FF25	30/32/36	25	20	23,9	15	1,35
FF30	36/40	30	21	28,6	16	1,75